


LAMP TYPE	20W Self-Ballast Induction Lamp
APPLICATION	Retrofit kit for existing luminaires
WORK HEIGHT	Fitting Dependant
WORK ANGLE	Fitting Dependant

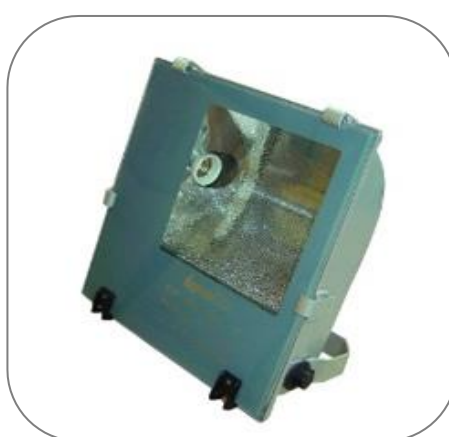

TOTAL POWER	20W
LUMENS	1 258 lm
LIFESPAN	30 000 h
COL TEMPS	Warm/Cool White
CRI	Ra > 81
POWER FACTOR	> 0.80

DIMMABLE	No
VOLTAGE	AC 180 ~ 265 V
WORKING TEMP	-20°C to 40°C
MATERIAL	Glass
FITTING TYPE	E27 and E40 base fittings
AMPERES	0.109 A

The 20W self-ballast induction lamp is used as an energy-efficient retrofit option for existing light fixtures. Using an E27 or E40 fitting, the lamp is simply screwed into the existing socket. Lamp fixtures using an independent ballast should have this removed from the system completely. The self-ballast induction lamp offers all the advantages of induction lighting in a small compact package. The excellent Colour Rendering Index of the lamp boosts lighting for a brighter illumination using the photometrics of the fixture being retrofitted.

PACKAGING: Cardboard box.

INSTALLING: Ensure that the base socket connection does not go through a ballast.
Screw the bulb in and enjoy savings!

WARRANTY: 2-year manufacturing warranty - incorrect operation, misuse or unqualified installation could result in the warranty being voided. Please contact Lighting Revolution for further explanation on these guidelines.

PRICE: Please contact Lighting Revolution for an official quotation.